

Light and UV curing is becoming increasingly popular in the field of domestic sewer rehabilitation. Developed for this purpose, lineTEC presents the ideal product for small and medium nominal widths: the **lineTEC ProFlex S UV!**



**Innovative fiber - Faster curing!**

**10x higher light transmission thanks to innovative PES UVx 10 fiber\***

- Pulling speeds >1m/min\*\*
- Safe, fast curing
- Applicable in the wavelength range 250nm – 600nm

**Usual stretching and processing properties \***

- Able to manage bends of up to 90°
- Ideal for small and medium nominal diameters up to DN 250

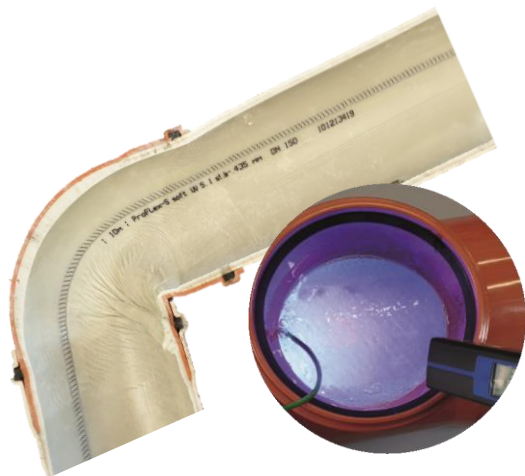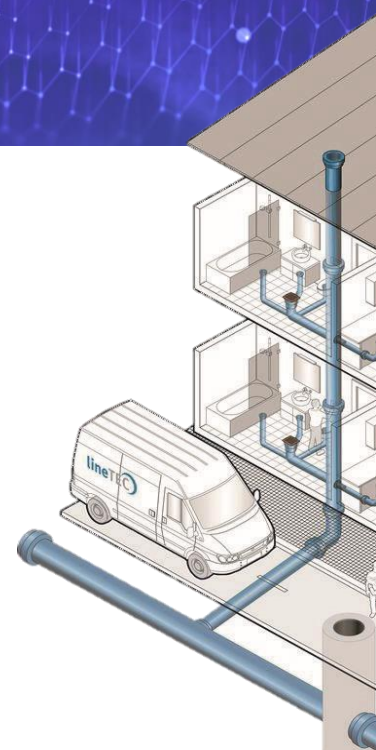

**lineTEC ProFlex S UV**

2 products, 10 Variants

**lineTEC ProFlex S UV 4,5**

- 4,5 mm wall thickness
- Range of application: DN 100 – DN 250

**lineTEC ProFlex S UV 4,5**

- 5,1 mm wall thickness
- Range of application: DN 100 – DN 250

Want to learn more? For more information, visit [www.vfg-linetec.com](http://www.vfg-linetec.com) or contact us directly!